



2025 PRODUCT CATALOG

Passenger & Light Truck Tires (United States)

ZAFCO's first in-house brand,
ZEETEX was born in 2005 and is
now sold in over 132 countries.

ZEETEX has been a key player in the replacement tire industry since its inception. With unique tread patterns, enhanced control, silica compound, and environmentally friendly solutions, the **ZEETEX** brand is committed to providing the best value for money to our customers. Whether it is integration with cutting-edge technology in tire production, or first-class supply-chain management, we strive to ensure every tire reaches the end user in perfect condition.

ZEETEX's proven performance and continuous efforts to offer consumers a value-driven proposition and ride satisfaction has led to growth at a tremendous pace.

PASSENGER

ULTRA HIGH PERFORMANCE

SPORT UTILITY VEHICLE

4X4

LIGHT TRUCK

INSIDE A ZEETEX TIRE

- 1

2 PLIES HIGH TURN UP POLYESTER CASING
- 2

2 HIGH TENSILE STEEL LAYER BELTS
- 3

2 CYCLES SPIRAL JOINTLESS CAP STRIP
- 4


TRIPLE TREAD COMPOUND

with HMLS (high modulus and low shrinkage) material allows high stability and uniformity.

at optimized angles for additional safety.

with HMPLS (high melting point with low shrinkage) material to protect steel belts and casing, as well as enhance stability and prevent deformation of tire shape.

1. TREAD CAP: Made with a silica compound for low noise, rolling resistance, and longevity.
2. WING: Sidewall type compound allows bonding between tread and sidewall.
3. CUSHION: Extra tackiness and low carbon compound creates adhesion between tread and casing while lowering heat buildup.

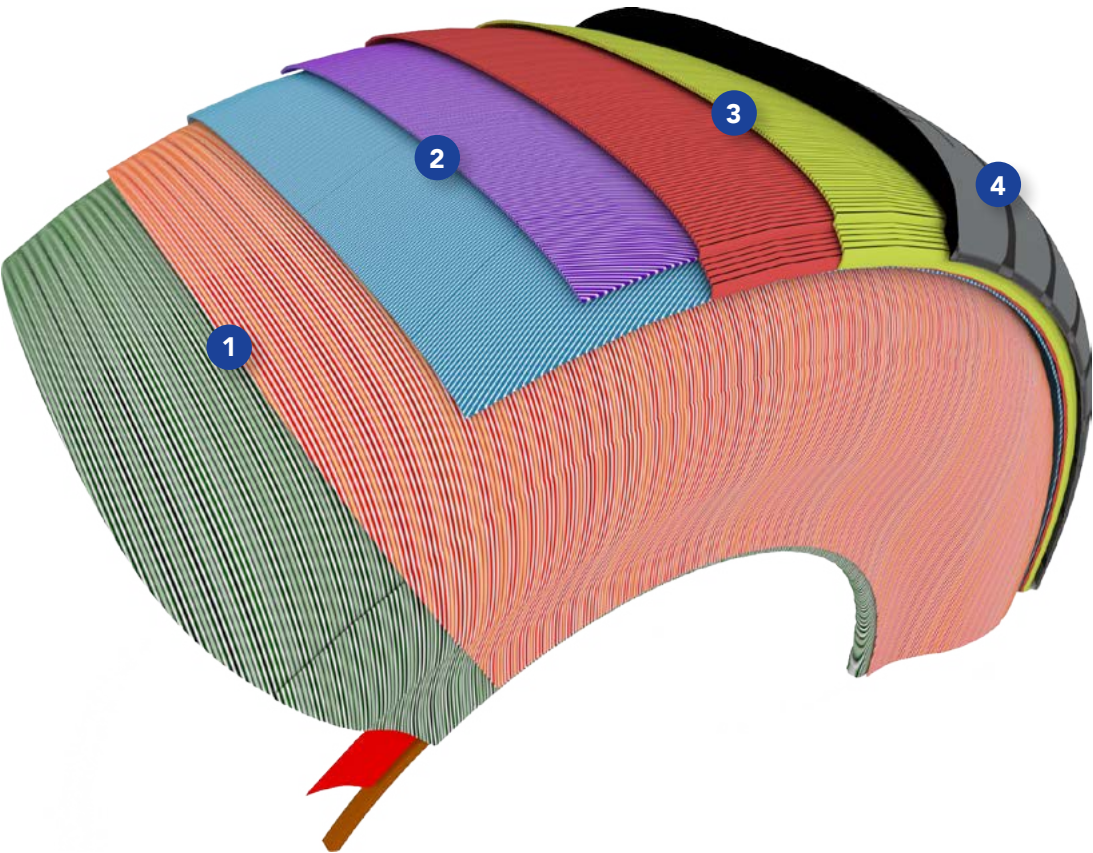

WHY ZEETEX?



HIGH-QUALITY MATERIALS

ZEETEX tires are manufactured using a silica compound that is typically found in premium brands, making the quality comparable to higher tier brands which allows our dealers to stay competitive in the market.



COMPETITIVE WARRANTY COVERAGE

ZEETEX has a comprehensive warranty program that can be used as a selling tool for dealers or as a way to backup their own warranty programs.



FACTORY-DIRECT PROGRAM

Our tires are shipped factory-direct from our manufacturing facilities in Indonesia & Thailand. We partner with domestic dealers who are container-capable to distribute our tires to smaller dealers.



SELL-OUT SUPPORT

ZEETEX customers receive unique sell-out support from ZAFCO, including access to point-of-sales materials and resources through our online Dealer Portal as well as customized training programs.



MORE THAN JUST PASSENGER TIRES

The ZEETEX passenger line offers a complete portfolio of tires with size assortments for multiple applications and segments. ZEETEX also makes tires for ATV, Specialty Trailer, and Commercial applications.

For Passenger Cars

ALL SEASON

UTQG 400 A A

ZT2000


The ZEETEX ZT2000 is designed to deliver better traction and cornering while resisting irregular wear, giving you a smooth, long-lasting, and environmentally friendly ride.



Optimal pitch variation of tread design reduces mono pitch sound and ensures better traction



Larger and curved tread blocks on outer shoulder ensure better cornering



Independent tread blocks on inner shoulders deliver better traction on wet surfaces in straight line motion



Enhanced stiffness of the tread blocks offer remarkable resistance against irregular wear, increasing tire longevity

Rim Diameter	Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				lbs	psi	inches	inches	inches	32nds
16	55	195/55R16	87V	1201	44	6.0	7.9	24.4	9
15	65	175/65R15	84H	1102	44	5.0	7.0	24.0	9
		215/65R15	96H	1565	44	6.5	8.7	26.0	10
14	55	155/55R14	69V	717	44	5.0	6.4	20.7	9
	65	165/65R14	79T	963	44	5.0	6.7	22.4	9
	70	175/70R14	84T	1102	44	5.0	7.0	23.7	9
13	65	175/65R13	80T	992	44	5.0	7.0	22.0	9
	70	155/70R13	75T	853	44	4.5	6.2	21.6	9
	80	145/80R13	75T	853	44	4.0	5.7	22.1	9
12	70	155/70R12	73T	805	44	4.5	6.2	20.6	9
		165/70R12	77T	908	44	5.0	6.7	21.1	9

For Passenger Cars

ALL SEASON

UTQG 400 A A



ZT3000

The ZEETEX ZT3000 is an all-season pattern engineered to be more fuel efficient, delivering driving comfort and confident handling in all weather conditions.



Asymmetrical pattern allows balanced driving behavior in all weather conditions



Optimal pitch variation reduces road noise, creating additional driving comfort



Circumferential & lateral grooves offer exception wet grip & traction, resulting in shorter braking distance

Rim Diameter	Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				lbs	psi				32nds
17	65	215/65R17	98H	1653	44	6.5	8.4	28.0	10
16	55	205/55R16	94V XL	1477	44	6.5	8.4	24.9	9
	60	205/60R16	96H XL	1565	44	6.0	8.0	25.7	10
		215/60R16	99H XL	1709	44	6.5	8.7	26.1	10
		225/60R16	102H XL	1874	44	6.5	9.0	26.6	10
		215/65R16	102H XL	1874	44	6.5	8.4	27.0	10
15	60	185/60R15	88H XL	1235	44	5.5	7.2	23.7	10
		195/60R15	88H	1235	44	6.0	7.9	24.2	10
		205/60R15	91V	1356	44	6.0	8.2	24.7	10
	65	185/65R15	88H	1235	44	5.5	7.2	24.4	10
		195/65R15	95H XL	1521	44	6.0	7.6	25.0	10
		205/65R15	99H XL	1709	44	6.0	8.0	25.5	10
	70	205/70R15	100H XL	1764	44	6.0	8.0	26.3	10
		215/70R15	98T	1653	44	6.5	8.4	26.9	10
	75	235/75R15	109T XL	2271	44	6.5	9.3	28.9	11
	60	205/60R14	88H	1235	44	6.0	8.2	23.7	10
14	65	175/65R14	82H	1047	44	5.0	7.2	22.6	9
		185/65R14	90H XL	1323	44	5.5	7.2	23.5	10
		185/70R14	88H	1235	44	5.5	7.4	24.3	10
	70	195/70R14	95H XL	1521	44	6.0	7.6	24.8	10
13	60	175/60R13	77H	908	44	5.0	7.0	21.3	10
	65	165/65R13	77T	908	44	5.0	6.7	21.4	9
	70	175/70R13	82H	1047	44	5.0	7.0	22.7	10



ZT5000 max

THE NEXT-GEN PASSENGER TIRE

For Passenger Cars

ALL SEASON

UTQG500 A A




ZT5000 max

This next-gen passenger tire offers enhanced performance during wet conditions. A closed shoulder block design allows better steering response and tire longevity.



Wide positioning of four main grooves eject water at a faster rate for improved wet grip



Angular sipes and rigid blocks on the inner side increase road grip and traction while cornering



Closed shoulder blocks enhance steering response and stability while preventing irregular wear

Rim Diameter	Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				lbs	psi				32nds
17	60	215/60R17	96H	1565	44	6.5	8.7	27.2	10
		225/60R17	99V	1710	44	6.5	9.0	27.6	10
16	60	195/60R16	89H	1280	44	6.0	7.9	25.2	10
		205/60R16	92V	1390	44	6.0	8.2	25.7	10
		215/60R16	99V XL	1710	50	6.5	8.7	26.1	10
		225/60R16	102V XL	1875	50	6.5	9.0	26.6	10
	65	205/65R16	95V	1520	44	6.0	8.2	26.5	10
		215/65R16	98H	1655	44	6.5	8.7	27.0	10
15	60	185/60R15	84H	1100	44	5.5	7.4	23.7	10
		195/60R15	88H	1235	44	6.0	7.9	24.2	10
		205/60R15	91V	1355	44	6.0	8.2	24.7	10
	65	185/65R15	88H	1235	44	5.5	7.4	24.4	10
		195/65R15	91H	1355	44	6.0	7.9	25.0	10
		205/65R15	94V	1475	44	6.0	8.2	25.5	10
	70	205/70R15	96H	1565	44	6.0	8.2	26.3	10
		215/70R15	98H	1655	44	6.5	8.7	26.9	10
14	65	165/65R14	79H	965	44	5.0	6.7	22.4	9
		175/65R14	82H	1045	44	5.0	7.0	23.0	10
		185/65R14	86H	1170	44	5.5	7.4	23.5	10
	70	175/70R14	88H XL	1235	50	5.0	7.0	23.7	10
		185/70R14	88H	1235	44	5.5	7.4	24.3	10
		195/70R14	95H XL	1520	50	6.0	7.9	24.8	10

Upcoming sizes

Rim Diameter	Series	Size	Load Index / Speed Symbol
15	55	185/55R15	82V
	60	175/60R15	81H

ZT5000 max



This next-gen passenger tire offers enhanced performance during wet conditions. A closed shoulder block design allows better steering response and tire longevity.





Performance results against Tier 2 & Tier 3 brands tested in IDIADA, Spain

Tire size tested: 225/60R17 99V



Internal Noise on *Smooth Road* @ 37.2 mph (60 kph)

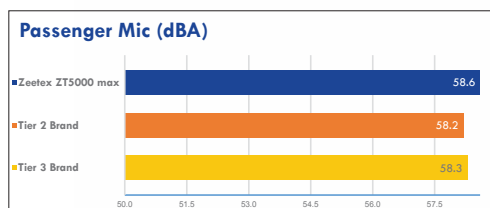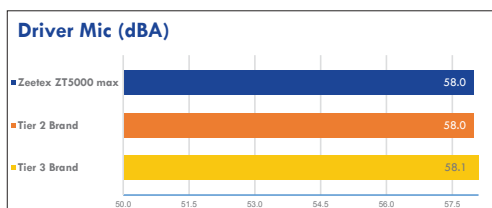



Internal Noise on *Smooth Road* @ 49.7 mph (80 kph)

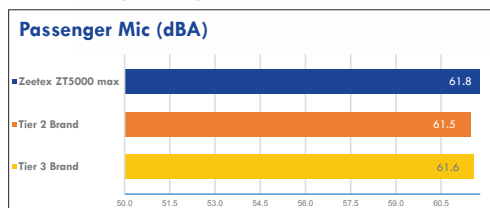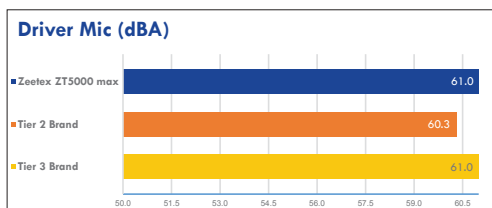


Internal Noise on *Rough Road* @ 37.2 mph (60 kph)

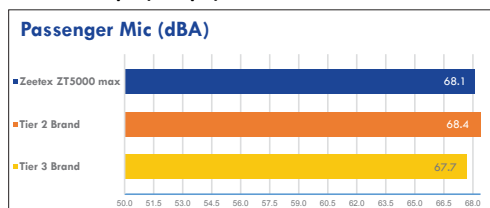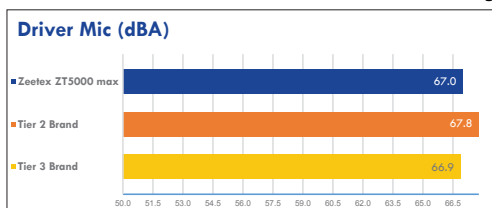


Internal Noise on *Rough Road* @ 49.7 mph (80 kph)

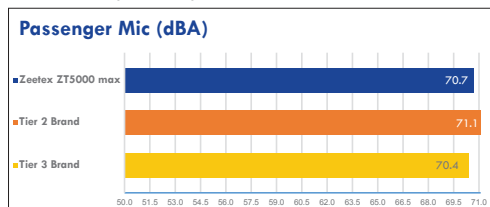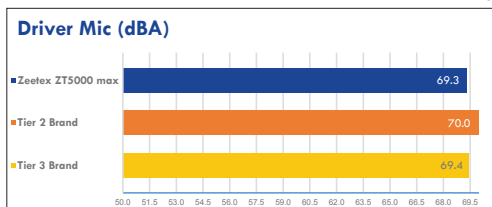


Dry Braking Distance in Feet

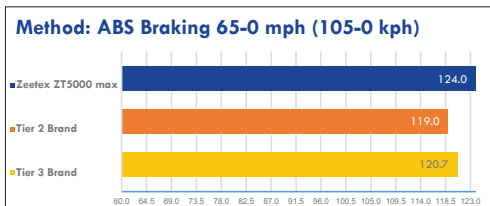

Dry Handling

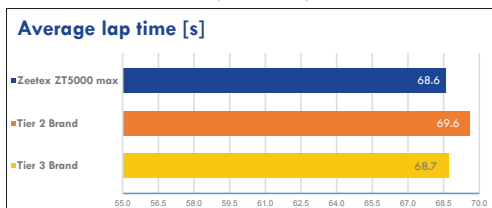

Wet Handling

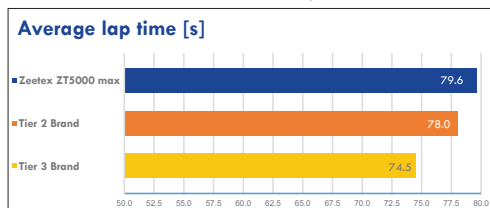

For High-performance and Luxury Vehicles

ALL SEASON

UTQG400 A A



HP1000

The ZEETEX HP1000 is designed for superior driving performance and optimized handling and steering accuracy, offering you a controlled and confident ride.



Serrations on the groove wall reduce pipe resonance noise making it an ultra-silent tire



Wide circumferential & lateral grooves offer outstanding resistance against aquaplaning



Asymmetric tread design & solid shoulder blocks allow quick response during turns at high speed

Rim Diameter	Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				lbs	psi	inches	inches	inches	32nds
20	35	225/35ZR20	93Y XL	1433	44	8.0	9.1	26.2	10
		245/35ZR20	95Y XL	1521	44	8.5	9.8	26.8	10
		255/35ZR20	97Y XL	1609	44	9.0	10.2	27.0	10
		275/35ZR20	102Y XL	1874	44	9.5	10.9	27.6	11
	40	245/40ZR20	99Y XL	1709	44	8.5	9.8	27.7	10
19	30	285/30ZR19	98Y XL	1653	44	10.0	11.4	25.8	10
	35	225/35ZR19	88Y XL	1235	44	8.0	9.1	25.2	10
		235/35ZR19	91Y XL	1356	44	8.5	9.5	25.5	10
		245/35ZR19	93Y XL	1433	44	8.5	9.8	25.8	10
		255/35ZR19	96Y XL	1565	44	9.0	10.2	26.0	10
		265/35ZR19	98Y XL	1653	44	9.5	10.7	26.3	10
	40	245/40ZR19	98Y XL	1653	44	8.5	9.8	26.7	10
		255/40ZR19	100Y XL	1764	44	9.0	10.2	27.0	10
		275/40ZR19	105Y XL	2039	44	9.5	10.9	27.7	11
	45	245/45ZR19	102Y XL	1874	44	8.0	9.6	27.7	10
18	35	215/35ZR18	84W XL	1102	44	7.5	8.6	23.9	10
		265/35ZR18	97W XL	1609	44	9.5	9.8	25.7	10
		275/35ZR18	99Y XL	1709	44	9.5	10.9	25.6	11
	40	225/40ZR18	92Y XL	1389	44	8.0	9.1	25.1	10
		235/40ZR18	95Y XL	1521	44	8.5	9.5	25.4	10
		245/40ZR18	97Y XL	1609	44	8.5	9.8	25.7	10
	45	225/45ZR18	95Y XL	1521	44	7.5	8.9	25.6	10
		245/45ZR18	100Y XL	1764	44	8.0	9.6	26.7	10
	50	225/50R18	99V XL	1709	44	7.0	9.4	29.1	10
		235/50ZR18	97W	1609	44	7.5	9.6	27.3	10
	60	235/60R18	107V XL	2150	44	7.0	9.4	29.1	10
17	40	205/40ZR17	84W XL	1102	44	7.5	8.3	23.5	10
		245/40ZR17	91W	1356	44	8.5	9.5	24.4	10
	45	205/45ZR17	88W XL	1235	44	7.0	8.1	24.3	10
		215/45ZR17	91W XL	1356	44	7.0	8.4	24.6	10
		225/45ZR17	94W XL	1477	44	7.5	8.9	25.0	10
		235/45ZR17	97W XL	1609	44	8.0	9.3	25.4	10
		245/45ZR17	95W	1521	44	8.0	9.6	25.7	10

For High-performance and Luxury Vehicles

ALL SEASON

UTQG400 A A

HP1000

The ZEETEX HP1000 is designed for superior driving performance and optimized handling and steering accuracy, offering you a controlled and confident ride.



Rim Diameter	Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				lbs	psi	inches	inches	inches	32nds
17	50	205/50ZR17	93W XL	1433	44	6.5	8.4	25.1	10
		215/50ZR17	95W XL	1521	44	7.0	8.9	25.5	10
		225/50ZR17	94W	1477	44	7.0	9.2	25.9	10
	55	215/55ZR17	94W	1477	44	7.0	8.9	26.3	10
		225/55R17	97V	1609	44	7.0	9.2	26.8	10
16	45	205/45ZR16	87W XL	1202	44	7.0	8.1	23.2	10
	50	195/50R16	88V XL	1235	44	6.0	7.9	23.7	9
		205/50ZR16	87W	1202	44	6.5	8.4	24.1	10
	55	205/55ZR16	91W	1356	44	6.5	8.4	24.9	10
		215/55ZR16	97W XL	1609	44	7.0	8.9	25.3	10
		225/55ZR16	99W XL	1709	44	7.0	9.2	25.7	10
15	55	195/55R15	89V XL	1279	44	6.0	7.9	23.4	9
		205/55R15	88V	1235	44	6.5	8.4	23.9	9



HP5000 max

THE NEXT-GEN ULTRA-HIGH PERFORMANCE TIRE

For High-performance and Luxury Vehicles


ALL SEASON

UTQG340 A A



HP5000 max

This next-gen ultra-high performance tire is designed for the modern day driver with an innovative tread and sidewall design and a unique "helical" main groove that facilitates quick water evacuation. The HP5000 Max features a soft tread appearance to deliver a very quiet and comfortable ride.



Ultra-modern tread and sidewall design suitable for modern vehicles and roads



All new "helical" main groove combined with three main grooves allow rapid water ejection by adding an extra swirling effect



Soft tread appearance delivers a very quiet drive

Rim Diameter	Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				lbs	psi	inches	inches	inches	32nds
21	35	245/35R21	96Y XL	1565	50	8.5	9.8	27.8	10
20	30	275/30R20	97Y XL	1610	50	9.5	10.9	26.5	10
	35	235/35R20	92Y XL	1390	50	8.5	9.5	26.5	10
		245/35R20	95Y XL	1520	50	8.5	9.8	26.8	10
		255/35R20	97Y XL	1610	50	9.0	10.2	27.0	10
		265/35R20	99Y XL	1710	50	9.5	10.7	27.3	10
		275/35R20	102Y XL	1875	50	9.5	10.9	27.6	10
		295/35R20	105Y XL	2040	50	10.5	11.9	28.1	10
	40	245/40R20	99Y XL	1710	50	8.5	9.8	27.7	10
19	30	255/40R20	101Y XL	1820	50	9.0	10.2	28.0	10
		265/30R19	93Y XL	1435	50	9.5	10.7	25.3	10
	35	235/35R19	91Y XL	1355	50	8.5	9.5	25.5	10
		245/35R19	93Y XL	1435	50	8.5	9.8	25.8	10
		255/35R19	96Y XL	1565	50	9.0	10.2	26.0	10
		265/35R19	98Y XL	1655	50	9.5	10.7	26.3	10
		275/35R19	100Y XL	1765	50	9.5	10.9	26.6	10
	40	225/40R19	93Y XL	1435	50	8.0	9.1	26.1	10
		245/40R19	98Y XL	1655	50	8.5	9.8	26.7	10
		255/40R19	100Y XL	1765	50	9.0	10.2	27.0	10
	45	275/40R19	105Y XL	2040	50	9.5	10.9	27.7	10
18	35	245/45R19	102Y XL	1875	50	8.0	9.6	27.7	10
		255/35R18	94Y XL	1475	50	9.0	10.2	25.0	10
		265/35R18	97Y XL	1610	50	9.5	10.7	25.3	10
	40	275/35R18	99Y XL	1710	50	9.5	10.9	25.6	10
		225/40R18	92Y XL	1390	50	8.0	9.1	25.1	10
		235/40R18	95Y XL	1520	50	8.5	9.5	25.4	10
		245/40R18	97Y XL	1610	50	8.5	9.8	25.7	10
	45	225/45R18	95Y XL	1520	50	7.5	8.9	25.9	10
		235/45R18	98Y XL	1655	50	8.0	9.3	26.3	10
		245/45R18	100Y XL	1765	50	8.0	9.6	26.7	10
	50	225/50R18	99W XL	1710	50	7.0	9.2	26.9	10
		235/50R18	101Y XL	1820	50	7.5	9.6	27.3	10

For High-performance and Luxury Vehicles

ALL SEASON

UTQG340 A A

HP5000 max



Rim Diameter	Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				lbs	psi	inches	inches	inches	32nds
17	40	245/40R17	95Y XL	1520	50	8.5	9.8	24.7	10
	45	205/45R17	88W XL	1235	50	7.0	8.1	24.3	10
		215/45R17	91Y XL	1355	50	7.0	8.4	24.6	10
		225/45R17	94Y XL	1475	50	7.5	8.9	25.0	10
		235/45R17	97Y XL	1610	50	8.0	9.3	25.4	10
		245/45R17	99Y XL	1710	50	8.0	9.6	25.7	10
	50	205/50R17	93Y XL	1435	50	6.5	8.4	25.1	10
		215/50R17	95W XL	1520	50	7.0	8.9	25.5	10
		225/50R17	98W XL	1655	50	7.0	9.2	25.9	10
	55	215/55R17	98W XL	1655	50	7.0	8.9	26.3	10
		225/55R17	101W XL	1820	50	7.0	9.2	26.8	10
		235/55R17	103W XL	1930	50	7.5	9.6	27.2	10
16	45	205/45R16	87W XL	1200	50	7.0	8.1	23.2	10
	50	195/50R16	88V XL	1235	50	6.0	7.9	23.7	10
		205/50R16	91W XL	1355	50	6.5	8.4	24.1	10
	55	195/55R16	91V XL	1355	50	6.0	7.9	24.4	10
		205/55R16	94W XL	1475	50	6.5	8.4	24.9	10
		215/55R16	97W XL	1610	50	7.0	8.9	25.3	10
15	55	195/55R15	89V XL	1280	50	6.0	7.9	23.4	10

Upcoming sizes

Rim Diameter	Series	Size	Load Index / Speed Symbol
19	40	235/40R19	96Y XL
	45	225/45R19	96Y XL
17	55	205/55R17	95V XL
15	50	195/50R15	82V

For High-performance and Luxury Vehicles

ALL SEASON

UTQG340 A A

HP5000 max



This next-gen ultra-high performance tire is designed for the modern day driver with an innovative tread and sidewall design and a unique "helical" main groove that facilitates quick water evacuation. The HP5000 Max features a soft tread appearance to deliver a very quiet and comfortable ride.





Performance results against Tier 2 & Tier 3 brands tested in IDIADA, Spain

Tire size tested: 225/55R17 101W XL



Internal Noise on Smooth Road @ 37.2 mph (60 kph)

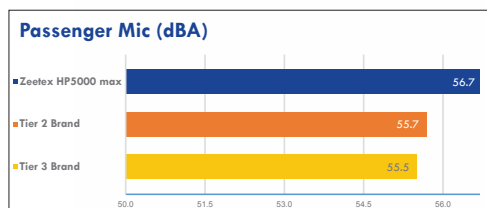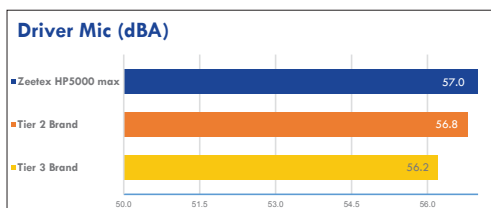



Internal Noise on Smooth Road @ 49.7 mph (80 kph)

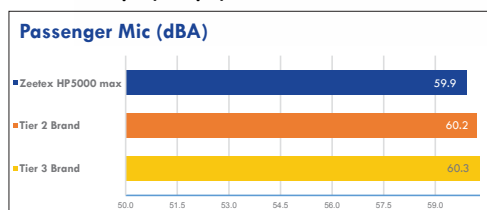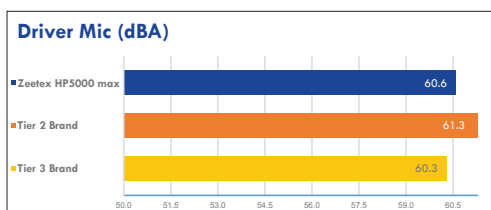


Internal Noise on Rough Road @ 37.2 mph (60 kph)

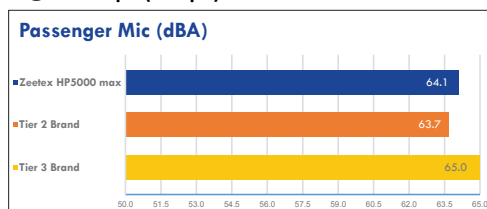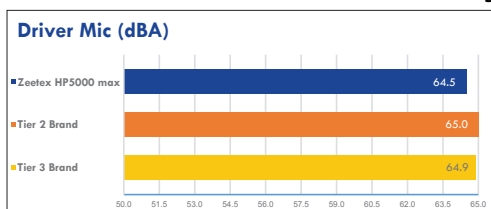


Internal Noise on Rough Road @ 49.7 mph (80 kph)

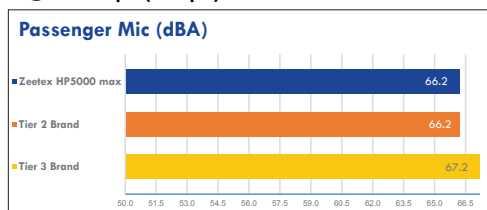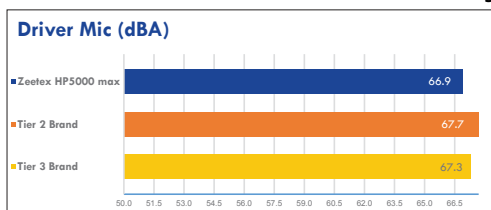


Dry Braking Distance in Feet

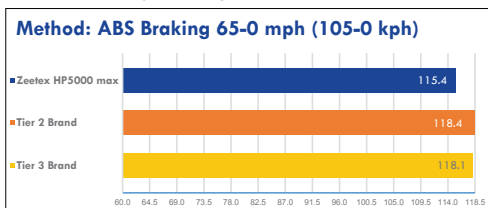

Dry Handling

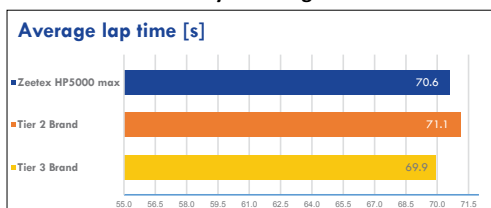

Wet Handling

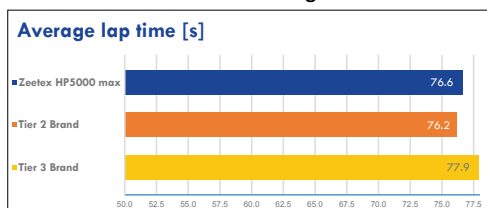

For Crossovers and Sports Utility Vehicles


ALL SEASON

UTQG 400 A A



SU1000

The ZEETEX SU1000 is engineered with comfort in mind, working quietly and confidently on all road surfaces.



Serrations on the groove wall reduce pipe resonance, delivering an exceptionally silent ride



Absorption of road inputs delivers extra-ordinary driving comfort



Improved vehicle stability & reduced braking distance in wet & dry conditions

Rim Diameter	Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				lbs	psi	inches	inches	inches	32nds
24	35	295/35R24	110V XL	2337	51	10.5	11.9	32.1	10
		305/35R24	114V XL	2601	51	11.0	12.3	32.4	11
22	30	255/30ZR22	95W XL	1521	51	9.0	10.2	28.1	10
	35	265/35ZR22	102W XL	1874	51	9.5	10.7	29.3	10
	40	305/40ZR22	114W XL	2601	51	11.0	12.3	31.6	11
	45	285/45R22	114V XL	2601	51	9.5	11.2	32.1	11
21	35	295/35R21	107V XL	2149	51	10.5	11.9	29.1	11
20	40	275/40ZR20	106Y XL	2094	51	9.5	10.9	28.7	11
		245/45ZR20	103Y XL	1929	51	8.0	9.6	28.7	10
		255/45R20	105V XL	2039	51	8.5	10.0	29.1	10
		275/45R20	110V XL	2337	51	9.0	10.7	29.8	11
	50	245/50R20	102V	1874	51	7.5	10.0	29.7	10
		265/50R20	112V XL	2469	51	8.5	10.9	30.5	11
		285/50R20	116V XL	2756	51	9.0	11.7	31.3	11
		235/55R20	102H	1874	51	7.5	9.6	30.2	10
	55	275/55R20	117V XL	2833	51	8.5	11.2	31.9	11
		275/60R20	115H	2679	51	8.0	11.0	33.0	11
19	50	255/50ZR19	107W XL	2149	51	8.0	10.4	29.1	11
	55	235/55R19	101H	1819	51	7.5	9.6	29.2	10
		255/55R19	111V XL	2403	51	8.0	10.4	30.0	11
		275/55R19	111V	2403	51	8.5	11.2	30.9	11
18	55	235/55R18	104V XL	1984	51	7.5	9.6	28.1	10
		255/55R18	109V XL	2271	51	8.0	10.4	29.0	11
		245/60R18	105H	2039	51	7.0	9.8	29.6	11
	60	285/60R18	120H XL	3086	51	8.5	11.5	31.5	11
		265/70R18	116H	2756	51	8.0	9.8	32.6	11
17	65	235/65R17	104H	1984	51	7.0	9.4	29.1	10
		245/65R17	107T	2149	51	7.0	9.8	29.5	10



SU5000 max

THE NEXT-GEN SUV TIRE

For Crossovers and Sports Utility Vehicles

ALL SEASON

UTQG 440 A A



SU5000 max

The SU5000 Max is a next-gen SUV tire engineered with a modern sipe style for a quiet and comfortable drive. Wide ribs are positioned for enhanced contact area to improve performance and fuel efficiency.



Positioning of extra wide ribs with four main grooves enhance road contact area for better performance and fuel efficiency



Impressively engineered with a modern sipe style and positioning for a quiet and comfortable drive



Sporty aesthetic and performance delivers a striking aesthetic seen on modern SUVs & Crossovers

Rim Diameter	Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				lbs	psi	inches	inches	inches	32nds
22	35	265/35R22	102Y XL	1875	50	9.5	10.7	29.3	10
		285/35R22	106Y XL	2095	50	10.0	11.4	29.9	10
	40	265/40R22	106Y XL	2095	50	9.5	10.7	30.4	10
		275/40R22	108Y XL	2205	50	9.5	10.9	30.7	10
		285/40R22	110Y XL	2335	50	10.0	11.4	31.0	10
		305/40R22	114W XL	2600	50	11.0	12.3	31.6	11
	45	285/45R22	114W XL	2600	50	9.5	11.2	32.1	11
21	35	275/50R22	115V XL	2680	50	8.5	11.2	32.9	10
		295/35R21	107Y XL	2150	50	10.5	11.9	29.1	10
	40	265/40R21	105Y XL	2040	50	9.5	10.7	29.3	10
		295/40R21	111Y XL	2405	50	10.5	11.9	30.3	10
	45	275/45R21	110Y XL	2335	50	9.0	10.7	30.7	10
20	35	275/50R21	113Y XL	2535	50	8.5	11.2	31.9	10
		315/35R20	110Y XL	2335	50	11.0	12.6	28.7	11
	40	275/40R20	106Y XL	2095	50	9.5	10.9	28.7	10
		245/45R20	103Y XL	1930	50	8.0	9.6	28.7	10
	45	255/45R20	105W XL	2040	50	8.5	10.0	29.1	10
		265/45R20	108Y XL	2205	50	9.0	10.5	29.4	10
		275/45R20	110Y XL	2335	50	9.0	10.7	29.8	10
	50	245/50R20	105W XL	2040	50	7.5	10.0	29.7	10
		255/50R20	109Y XL	2270	50	8.0	10.4	30.1	10
		265/50R20	111V XL	2405	50	8.5	10.9	30.5	10
		275/50R20	113W XL	2535	50	8.5	11.2	30.9	10
		285/50R20	116V XL	2755	50	9.0	11.7	31.3	11
	55	235/55R20	102W	1875	44	7.5	9.6	30.2	10
		255/55R20	110Y XL	2335	50	8.0	10.4	31.0	10
		275/55R20	117V XL	2835	50	8.5	11.2	31.9	11
	60	275/60R20	115V	2680	44	8.0	11.0	33.0	11
19	50	235/50R19	103W XL	1930	50	7.5	9.6	28.3	10
		255/50R19	107W XL	2150	50	8.0	10.4	29.1	10
		265/50R19	110Y XL	2335	50	8.5	10.9	29.5	10
	55	235/55R19	105Y XL	2040	50	7.5	9.6	29.2	10
		255/55R19	111W XL	2405	50	8.0	10.4	30.0	10
		275/55R19	111W	2405	44	8.5	11.2	30.9	10

For Crossovers and Sports Utility Vehicles

ALL SEASON

UTQG 440 A A

SU5000 max

The SU5000 Max is a next-gen SUV tire engineered with a modern sipe style for a quiet and comfortable drive. Wide ribs are positioned for enhanced contact area to improve performance and fuel efficiency.



Rim Diameter	Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				lbs	psi	inches	inches	inches	32nds
18	55	215/55R18	99V XL	1710	50	7.0	8.9	27.3	10
		235/55R18	104Y XL	1985	50	7.5	9.6	28.1	10
		255/55R18	109Y XL	2270	50	8.0	10.4	29.0	10
	60	235/60R18	103V	1930	44	7.0	9.4	29.1	10
		245/60R18	105V	2040	44	7.0	9.8	29.6	10
		255/60R18	112W XL	2470	50	7.5	10.2	30.0	10
		265/60R18	110V	2335	44	8.0	10.7	30.5	10
		285/60R18	116V	2755	44	8.5	11.5	31.5	11
	65	275/65R18	116H	2755	44	8.0	11.0	32.1	10
17	60	235/60R17	102V	1875	44	7.0	9.4	28.1	10
	65	225/65R17	102H	1875	44	6.5	9.0	28.5	10
		235/65R17	108V XL	2205	50	7.0	9.4	29.1	10

Upcoming sizes

Rim Diameter	Series	Size	Load Index / Speed Symbol
19	55	225/55R19	103Y XL
		245/55R19	107V XL
18	55	225/55R18	102Y XL
17	60	205/60R17	97W XL

SU5000 max



The SU5000 Max is a next-gen SUV tire engineered with a modern sipe style for a quiet and comfortable drive. Wide ribs are positioned for enhanced contact area to improve performance and fuel efficiency.





Performance results against Tier 2 & Tier 3 brands tested in IDIADA, Spain

Tire size tested: 245/45R20 103Y XL



Internal Noise on Smooth Road @ 37.2 mph (60 kph)

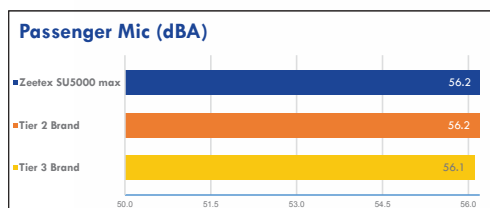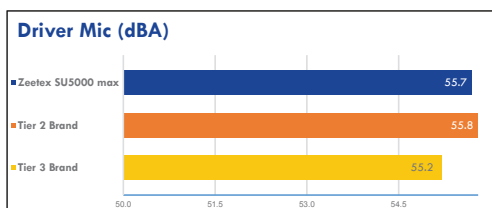



Internal Noise on Smooth Road @ 49.7 mph (80 kph)

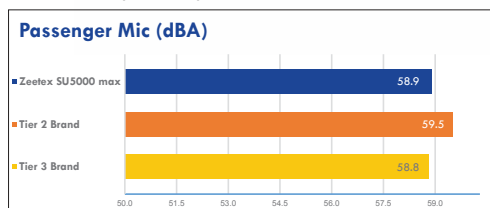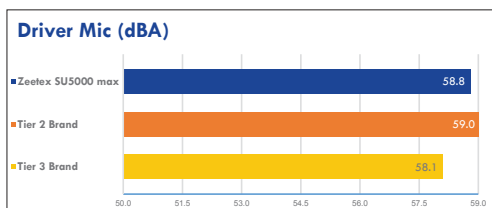


Internal Noise on Rough Road @ 37.2 mph (60 kph)

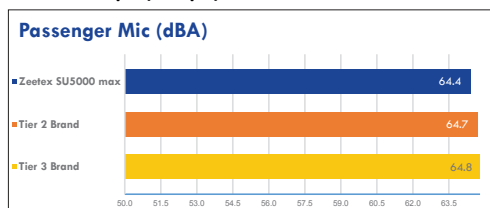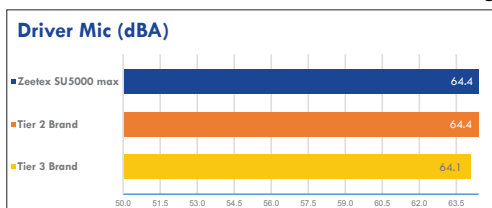


Internal Noise on Rough Road @ 49.7 mph (80 kph)

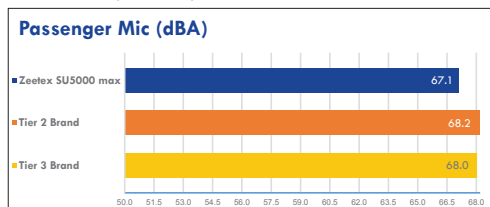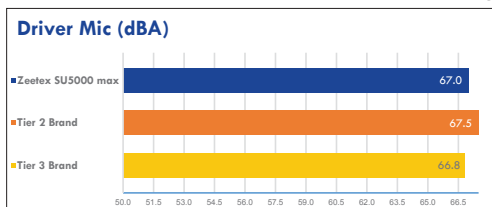


Dry Braking Distance in Feet

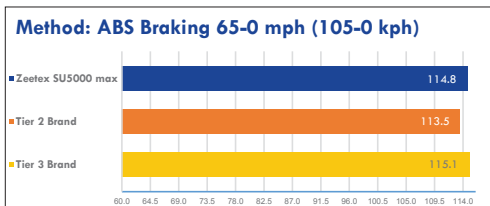

Dry Handling

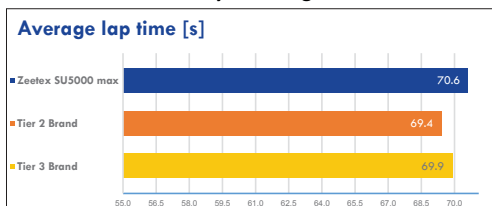

Wet Handling

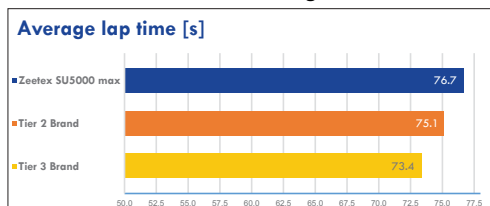

For 4x4's on Highway Terrain

ALL SEASON

UTQG 540 A A



HT1000

The ZEETEX HT1000 is designed with a unique tread that offers low noise and superior handling on wet conditions to ensure an exceptionally comfortable highway ride.



Ultra-modern variable pitch tread design reduces road noise, creating additional driving comfort on highway terrain



Wavy sipes designed for outstanding braking performance on wet conditions



Wider circumferential & lateral grooves evacuate water quickly to overcome aquaplaning

P METRIC

Rim Diameter	Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				lbs	psi				32nds
17	65	225/65R17	102H	1874	51	6.5	9.0	28.5	11
		265/65R17	112H	2469	51	8.0	10.7	30.6	12
		275/65R17	115H	2679	51	8.0	11.0	31.1	12
		285/65R17	116H	2756	51	8.5	11.5	31.6	12
	70	245/70R17	110T	2337	51	7.0	9.8	30.6	12
		265/70R17	115H	2679	51	8.0	10.7	31.7	13
16	65	235/65R16	103H	1929	51	7.0	8.9	28.0	11
	70	215/70R16	100H	1764	51	6.5	8.7	27.9	11
		225/70R16	103S	1929	51	6.5	9.0	28.4	11
		235/70R16	106T	2094	51	7.0	9.4	29.0	11
		245/70R16	107H	2149	51	7.0	9.8	29.5	11
		265/70R16	112H	2469	51	8.0	10.7	30.6	12
		275/70R16	114T	2601	51	8.0	11.0	31.2	12
	75	265/75R16	116T	2756	51	7.5	10.5	31.7	12

LT METRIC

Rim Diameter	Series	Size	PR	Load Index / Speed Symbol	Maximum Load (lbs)		Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
					Single	Dual	psi				32nds
17	70	LT 265/70R17	10	121/118S	3197	2910	80	8.0	10.7	31.7	16
16	75	LT 225/75R16	10	115/112S	2679	2469	80	6.0	8.8	29.5	16
		LT 245/75R16	10	120/116S	3086	2756	80	7.0	9.8	31.7	16
		LT 265/75R16	10	123/120S	3417	3086	80	7.5	10.5	31.7	15
	85	LT 215/85R16	10	115/112R	2679	2469	80	6.0	8.5	30.6	16
		LT 235/85R16	10	120/116R	3086	2756	80	6.5	9.3	31.7	16
15	Flotation	LT 31X10.50R15	6	109R	2271	-	51	8.5	10.6	30.7	16



HT5000 max

THE NEXT-GEN HIGHWAY TERRAIN TIRE

For 4x4's on Highway Terrain

ALL SEASON

UTQG 500 A A



HT5000 max

This next-gen highway terrain tire is a trendsetter that features a unique asymmetrical pattern and a distinct sidewall design uncommon for a 4x4 tire. the HT5000 max is designed to maximize stability and handling while offering extra grip and a silent drive.



A unique asymmetrical tread design with a distinct sidewall enhances the appearance of any 4x4 vehicle



Zig-zag, multi-waves and straight sipes increase grip on wet and dry roads



Four circumferential main grooves offer better stability and handling and reduce noise while driving on highways

Rim Diameter	Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				lbs	psi	inches	inches	inches	32nds
18	65	265/65R18	114H	2600	44	8.0	10.7	31.5	11
	70	255/70R18	113H	2535	44	7.5	10.2	32.1	11
		265/70R18	116H	2755	44	8.0	10.7	32.6	11
17	65	245/65R17	111H XL	2405	50	7.0	9.8	29.5	11
		265/65R17	112H	2470	44	8.0	10.7	30.6	11
		275/65R17	115H	2680	44	8.0	11.0	31.1	10
		285/65R17	116H	2755	44	8.5	11.5	31.6	10
		265/70R17	115H	2680	44	8.0	10.7	31.7	11
	70	265/70R17	115H	2680	44	8.0	10.7	31.7	11
16	70	215/70R16	100H	1765	44	6.5	8.7	27.9	11
		225/70R16	103H	1930	44	6.5	9.0	28.4	11
		235/70R16	106H	2095	44	7.0	9.4	29.0	11
		245/70R16	111H XL	2405	50	7.0	9.8	29.5	11
		255/70R16	111H	2405	44	7.5	10.2	30.1	11
		265/70R16	112H	2470	44	8.0	10.7	30.6	11
	75	245/75R16	111T	2405	44	7.0	9.8	30.5	11
		265/75R16	116T	2755	44	7.5	10.5	31.7	11
		265/75R16	116T	2755	44	7.5	10.5	31.7	11

For 4x4's on Highway Terrain

ALL SEASON

UTQG 500 A A

HT5000 max



This next-gen highway terrain tire is a trendsetter that features a unique asymmetrical pattern and a distinct sidewall design uncommon for a 4x4 tire. the HT5000 max is designed to maximize stability and handling while offering extra grip and a silent drive.





Performance results against Tier 2 & Tier 3 brands tested in IDIADA, Spain

Tire size tested: 265/65R17 112H



Internal Noise on Smooth Road @ 37.2 mph (60 kph)

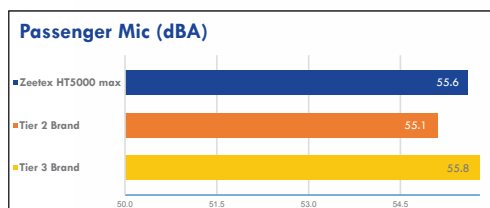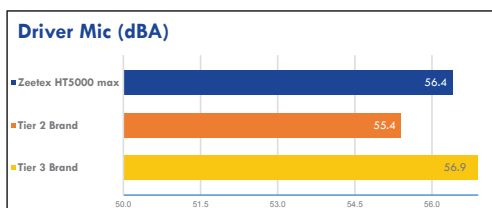



Internal Noise on Smooth Road @ 49.7 mph (80 kph)

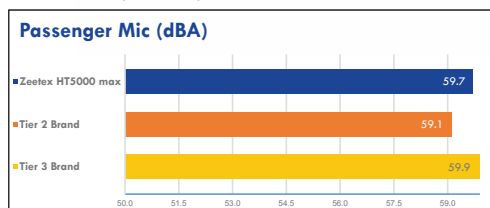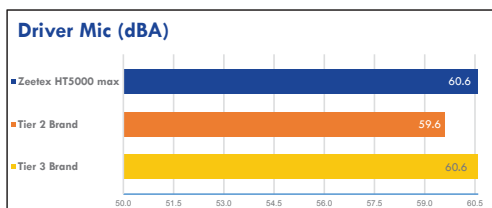


Internal Noise on Rough Road @ 37.2 mph (60 kph)

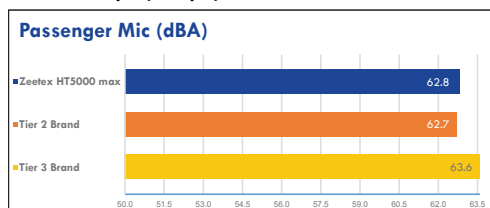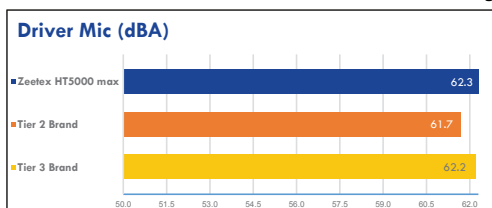


Internal Noise on Rough Road @ 49.7 mph (80 kph)

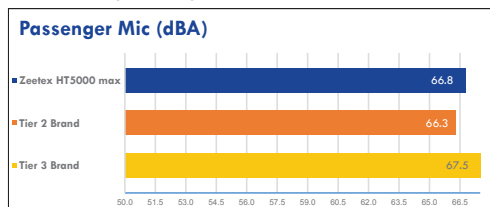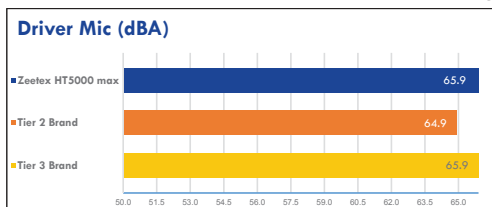

Dry Braking Distance in Feet

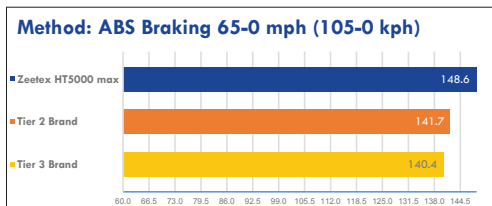

Dry Handling

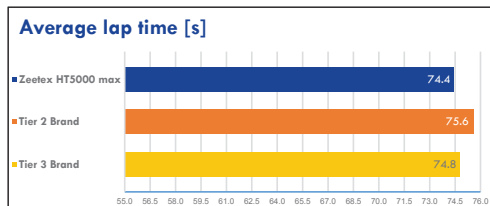

For 4x4's on All Terrain

ALL SEASON


UTQG 500 A B

AT1000

The ZEETEX AT1000 is engineered with special base rubber to deliver optimal performance on all types of terrain while ensuring a quiet and comfortable ride.



Cap-base construction with special base rubber delivers exceptional comfort and handling in both on & off-road conditions



Aggressive block design ensures better handling on all types of terrain while reducing road noise



Coupling blocks enhance dry grip and steering response; sipes enhance traction in wet conditions

P METRIC

Rim Diameter	Series	Size	Load Index / Speed Symbol	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				lbs	psi				32nds
17	65	265/65R17	112S	2470	51	8.0	10.7	30.6	12
	70	265/70R17	115S	2680	51	8.0	10.7	31.7	12
16	65	215/65R16	98T	1653	51	6.5	8.7	27	12
		255/65R16	109T	2270	51	7.5	10.2	29.1	12
	70	255/70R16	111S	2405	51	7.5	10.2	30.1	12
	75	245/75R16	111S	2405	51	7.0	9.8	30.5	12
15	70	205/70R15	96T	1565	51	6.0	8.2	26.3	13
		255/70R15	108S	2205	51	7.5	10.2	29.1	12
	75	215/75R15	100S	1765	51	6.0	8.5	27.7	12
		235/75R15	105S	2040	51	6.5	9.3	28.9	12
		195/80R15	96S	1565	51	5.5	7.7	27.3	11

LT METRIC


Rim Diameter	Series	Size	PR	Load Index / Speed Symbol	Maximum Load (lbs)		Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
					Single	Dual					32nds
20	55	LT 285/55R20	10	122/119R	3305	3000	80	9.0	11.7	32.4	15
		LT 305/55R20	10	121/118S	3195	2910	65	9.5	12.4	33.2	15
	65	LT 275/65R20	10	126/123S	3750	3415	80	8.0	11.0	34.1	15
18	65	LT 275/65R18	10	123/120S	3415	3085	80	8.0	11.0	32.1	16
	70	LT 275/70R18	10	125/122S	3640	3305	80	8.0	11.0	33.2	16
17	70	LT 245/70R17	10	119/116R	3000	2755	80	7.0	9.8	30.6	16
		LT 265/70R17	10	121/118S	3195	2910	80	8.0	10.7	31.7	15
		LT 285/70R17	10	121/118R	3195	2910	80	8.5	11.5	32.8	16
	75	LT 245/75R17	10	121/118R	3195	2910	80	7.0	9.8	31.5	15
	80	LT 235/80R17	10	120/117R	3085	2835	80	6.5	9.3	31.8	15
		LT 225/75R16	10	115/112R	2680	2470	80	6.0	8.8	29.3	16
16	75	LT 245/75R16	10	120/116R	3086	2756	80	7.0	9.3	31.7	16
		LT 265/75R16	10	123/120Q	3415	3085	80	7.5	10.5	31.7	15
		LT 285/75R16	10	126/123R	3750	3415	80	8.0	11.3	32.8	16
		LT 205/80R16	8	110/108Q	2335	2205	80	5.5	8.0	28.9	12
	85	LT 235/85R16	10	120/116Q	3085	2755	80	6.5	9.3	31.7	15
	Flotation	LT 31X10.50R15	6	109Q	2270	-	51	8.5	10.6	30.5	15

For 4x4's on Mud Terrain

ALL SEASON

MT1000

The ZEETEX MT1000 is built with stronger sidewall to provide a confident ride in all off-road conditions while minimizing impact damage.




3 ply polyester construction leads to a stronger sidewall and offers extra-ordinary resistance against impacts in off-roads



Anchor type aggressive tread blocks deliver remarkable off-road traction



Alternate scalloped shoulder lugs provide longer distance between shoulder blocks maximizing biting edges to increase traction in mud & rocks



Wide open shoulders and stepped block edges allow easy flushing of mud & silt

Rim Diameter	Series	Size	PR	Load Index / Speed Symbol	Maximum Load (lbs)		Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
					Single	Dual	psi				32nds
20	Flotation	LT 33X12.50R20	10	114Q	2601	-	65	10.0	12.5	32.5	21
		LT 35X12.50R20	10	121Q	3197	-	65	10.0	12.5	34.5	21
		LT 37X13.50R20	10	127Q	3858	-	65	11.0	13.6	36.5	21
18	Flotation	LT 35X12.50R18	10	123Q	3417	-	65	10.0	12.5	34.5	21
17	Flotation	LT 35X12.50R17	10	125Q	3638	-	65	10.0	12.5	34.5	21
15	75	LT 235/75R15	6	104/101Q	1984	1820	51	9.5	9.3	28.9	17

ABOUT ZEETEX LIMITED WARRANTY

This limited warranty covers all new ZEETEX brand replacement radial tires purchased after May 1, 2016, supplied either directly or through an authorized ZEETEX dealer, which are mounted on passenger cars, vans and light trucks and have been used on the same vehicle that they were originally installed on.

This warranty applies to consumers actually purchasing and using the tires in all of North America, limited to the 48 contiguous states, the District of Columbia, the non-contiguous states of Hawaii and Alaska, and Canada.

1. WORKMANSHIP & MATERIALS

ZEETEX warrants all eligible tires with a complete DOT identification number against defects in workmanship and materials. Upon examination, if ZEETEX determines that the tire(s) is not serviceable due to a condition covered by this warranty, it will be replaced by a comparable new ZEETEX tire as follows:

1. During the first 2/32" of the original usable tread, or within twelve (12) months from the date of purchase (proof of purchase required) whichever comes first, ZEETEX will replace the tire with a comparable new ZEETEX tire 100% free of charge. Applicable fees and taxes and costs of mounting and balancing are payable by the owner.
2. After the 100% replacement term expires and the tire is still within sixty (60) months of the date of purchase (proof purchase required), credit will be pro-rated towards the purchase of a comparable ZEETEX tire. The credit will be determined by the percentage of original tread depth remaining on the tire. Applicable fees and taxes and costs of mounting and balancing are payable by the owner.

The authorized ZEETEX dealer will determine the adjustment cost by multiplying the percentage of original usable tread worn by the current ZEETEX price in effect at the time of adjustment.

Refer to the example below to obtain the credit percentage:

RTD = Remaining Tread Depth

OTD = Original Tread Depth

If RTD = 5/32" = 5 and OTD = 10/32" = 10

The calculation is:

$$\frac{\text{Remaining Usable Tread Depth}}{\text{Original Usable Tread Depth}} = \frac{5}{10} = 0.5 = 50\%$$

2. MILEAGE TREADWEAR WARRANTY

In addition to the above workmanship and materials warranty, ZEETEX also warrants that the tread life of all replacement passenger tires or light truck tires, supplied either directly or through an authorized ZEETEX dealer, will have the following treadwear warranty coverage from the point of original purchase (proof of purchase required):

CATEGORY	PATTERN	MILEAGE COVERED
PCR	ZT3000	45,000 miles
	ZT5000 max	50,000 miles
UHP	HP1000	30,000 miles
	HP5000 max	30,000 miles
4x4 HT	HT1000	35,000 miles
	HT5000 max	50,000 miles
4x4 AT	AT1000	35,000 miles
SUV	SU1000	35,000 miles
	SU5000 max	40,000 miles

ZEETEX LIMITED WARRANTY

Passenger & Light Truck Tires | Effective Oct 2017 | North America

If a tire reaches the end of its usable tread life (2/32") before the stated mileage warranty, it will be replaced by a comparable ZEETEX tire on a pro rata basis. The authorized ZEETEX dealer will determine the adjustment cost by multiplying the percentage of mileage obtained by the current ZEETEX price in effect at the time of adjustment.

To make a claim, the owner must present the original ZEETEX Mileage Warranty Card, which records the date of purchase, name of purchaser, original mileage, and identification of the vehicle to an authorized ZEETEX dealer.

Eligibility For Mileage Tread Wear Warranty:

1. The tires must be rotated every 5,000 – 6,000 miles.
2. The owner must be the original purchaser of the tires and have the original copy of the invoice showing the application mileage.
3. The original purchaser must be the owner of the vehicle on which the tires were originally installed.
4. The tires are worn out evenly across the tread, down to the treadwear indicator (2/32") at which time they are considered to be 100% worn out. The tire must not have more than 2/32" tread depth difference.
5. The Tire Rotation Card must be completed by the servicing dealer.
6. For vehicles equipped with staggered size fitments (different tire sizes on the front and rear axles) which cannot be rotated, the mileage warranty for the front or rear tires will be 50% of the warranted miles specified under the standard ZEETEX treadwear warranty.

OWNER'S OBLIGATION

In order to be eligible for ZEETEX Limited Warranty coverage, the owner must:

1. Present the tire to any authorized ZEETEX dealer.
2. Submit or present a copy of the original purchase receipt with documented automobile mileage at time of tire installation and tire dismounting.
3. Submit a tire rotation record showing that all tires have been rotated at least every 5,000 – 6,000 miles (applicable to mileage warranty only).

4. Complete and sign a ZEETEX warranty claim form, which is available at any authorized dealer.
5. Pay the amount due on a new tire, less the amount of credit, including taxes, mounting and balancing charges and/or the cost of other services.

Once tires are returned to ZEETEX by an authorized dealer and credit has been issued, submitted tires become the property of ZEETEX.

To locate an authorized ZEETEX dealer, please visit www.zeetex.com.

DISCLAIMER:

DEALER'S OBLIGATION

To claim an adjustment from ZEETEX, the dealer must first complete a "Claim Adjustment Form" with the required details, which can be requested via email at claims@zafco.com or through our website resources at zafcointernational.com/resources. Each claim must be supported by three (3) medium resolution pictures per tire of the following:

1. Serial and DOT number, labeled as 1-1
2. Defect area, labeled as 1-2
3. Complete tire with the tread portion clearly visible, named 1-3; and so forth
4. A copy of the ZEETEX Limited Warranty Claim Form & Tire Rotation Card (applicable to mileage warranty only)

The completed "Claim Adjustment Form", together with the pictures, must be emailed to claims@zafco.com. The DOT and serial number cut-outs of adjusted claims must be mailed to us at the following address:

ZAFCO International

Attn: Zeetex Tires Technical Department
6745 NW 36th Street,
Suite 260
Miami, FL 33166
United States

All claims will be settled within thirty (30) working days upon receipt of full details using the instructions stated above.

ZEETEX LIMITED WARRANTY

Passenger & Light Truck Tires | Effective Oct 2017 | North America

TIRE REGISTRATION

It is important that you register your ZEETEX tires promptly upon purchase. Registration is an important safety procedure since it enables the manufacturer to notify you in the event of a product recall. To complete registration, you will need to provide:

1. Your contact information.
2. The tire DOT codes located on your tires.
3. Your dealer's contact information (where you acquired the tires from).

Please use the form available on www.zeetex.com for quick and easy registration of your tires.

SAFETY WARNING

ZEETEX makes your safety our top priority. It is essential for you to ensure proper use and maintenance of your tires to avoid any serious injury. Here are some safety tips we recommend to mitigate your risk of tire failure:

1. Owners must continue to rotate tires in accordance to their vehicle owner's manual or every 5,000 – 6,000 miles.
2. Tires should be regularly inspected by a qualified tire professional for any signs of damage.
3. Tires should be mounted only by trained professionals. Follow all instructions in the vehicle owner's manual or tire placard in vehicle to avoid under-inflation, overloading and misapplication.
4. Use approved rims and wheels only.
5. Do not spin tires on slippery surfaces such as snow, ice, or mud, or spin in excess of 35 mph (56 kph), as indicated on the speedometer.
6. We recommend replacing any tires that are beyond ten (10) years from their date of manufacture. If your vehicle manufacturer has specific recommendations for tire replacement, you should follow the specific recommendations for that vehicle.
7. Always avoid purchasing used tires. Previous usage may have damaged internal components that may lead to tire failure.
8. We recommend replacing all four tires at the same time. However, when only two are replaced, the new tires should be on the rear since deeper tread may provide better grip

and water evacuation in wet conditions.

9. We recommend routine air pressure checks as per your vehicle manufacturer's specifications.

Any tire, no matter how well constructed, may fail in use as a result of damage or misuse. If you experience any vibrations or ride disturbances, or notice a bulge, bump, or any kind of irregularities, we recommend having your tires evaluated by a qualified tire servicer immediately.





zeetex.com

Zafco International LLC

Countyline Corporate Park
11 104th Street, Suite W 4220
33018 Hialeah, FL

